

BRIPAVE H

EXTERNAL RECESSED

Tel: 0121 521 4500 Fax: 0121 521 4551 Email: sales@steelwaybrickhouse.co.uk www.steelway.co.uk

Steelway Bripave range of access covers and frames are designed for use on a variety of applications that require a range of infill materials to meet the aesthetic surroundings of architecturally designed landscapes. Primarily for use with varying depths of block paviors and slabs they can however also be filled with concrete, asphalt and even soil and grass. The complete range of Bripave products are tested unfilled to ensure stability and longevity under load. All Bripave ranges are suitable for slow moving vehicular traffic and are manufactured as either sealed (H) or plain seated (L).

Standard Features (H Range)

- Sealing channel within frame for filling with or suitable sealing compound
- Solid corner lifting bosses
- Tapered cover sides to prevent jamming in the frame
- Suitable for block or infill depths from 50mm to 100mm (plus bedding)
- 6mm thick mild steel to prevent distortion under load
- Fully flanged frame for ease of installation and stability
- Load tested to FACTA classifications AA - B - D unfilled
- Galvanized to BSEN ISO1461

Standard Features (L Range)

- Solid corner lifting bosses
- Suitable for block or infill depths from 50mm to 100mm (plus bedding)
- Load tested to FACTA classifications B - C - D unfilled
- Galvanized to BSEN ISO1461

Additional Features

- /DS Double seal frame (H range only)
- /Infill depth (insert your depth of infill - 50, 65, 80 100 etc.)
- /L2 2no Locking bolts
- /L4 4no Locking bolts
- /BE Decorative brass edge (H range only)
- /SE Decorative stainless steel edge (H range only)
- /RS Rubber seal inserted into standard sealing channel (H range only)
- /RE Internal cover reinforcing rods for concrete or other non block finish
- /Pi Lift out peep in cover flap (H range only)
- /140G 140 micron galvanizing (H range only)
- /DL Discreet lifting points

Size Range



Available in a multitude of sizes from 250 x 250mm clear opening to suit any chamber opening dimensions

Lifting Keys

Fig 9758B Single Lifting key

Fig R8473258 Threaded lifting eye bolt

Please note that due to the nature of the product mechanical lifting may be required

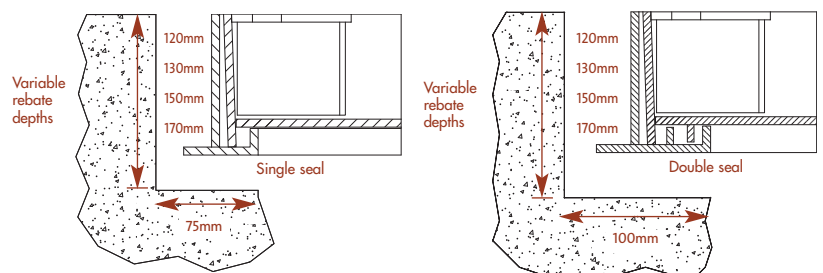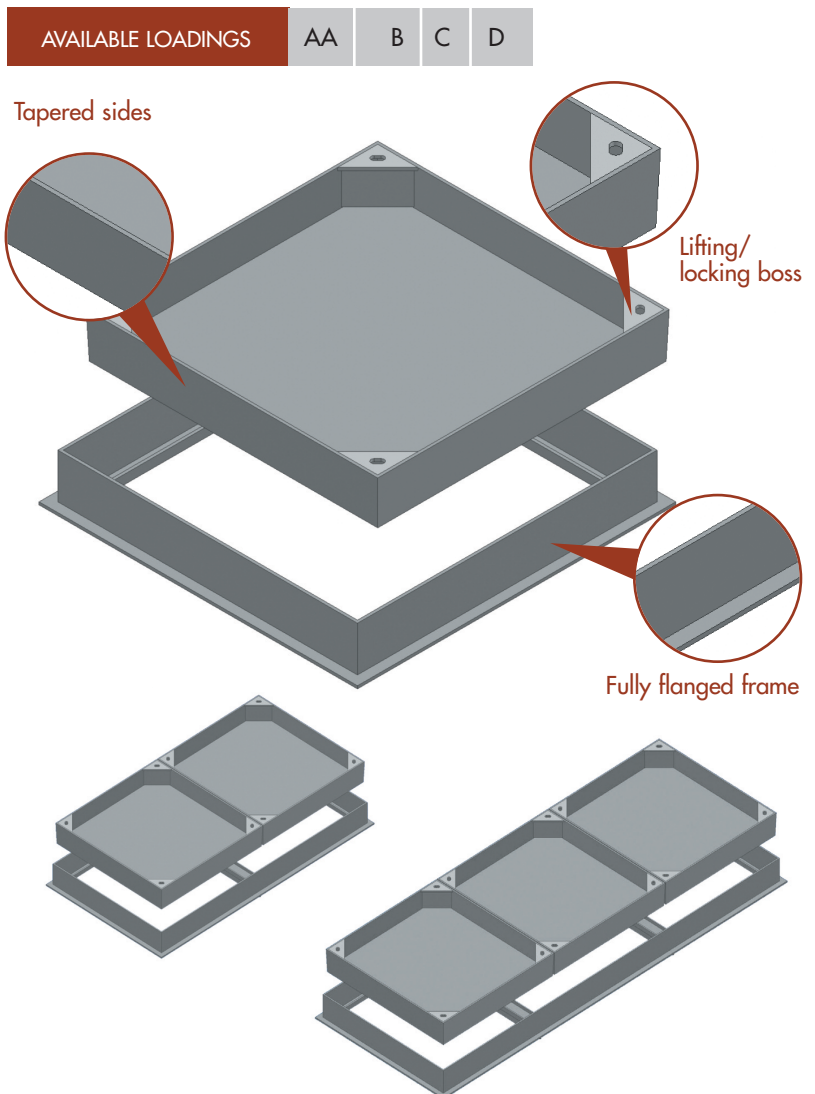

Example Specification

Fig 6333/600600/80/L4 = Single cover FACTA D / 600 x 600mm clear opening / 80mm block depth / 4no Locking bolts